




TT - Turntable Model



Accordion Bellows Skirting

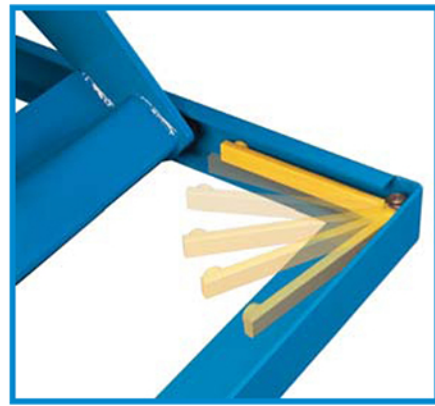

Hinged Maintenance Bars



Semi-Live Portability L2K Only



Cart Portability L2K / L3K Only



Contoured Platform Corners for Operator Safety

Warranty:  
Bishamon Industries Corporation warrants its products to be free from defects in material and workmanship for a period of one (1) year from the date of initial shipment. This warranty shall not apply to any misuse, mishandling, accident, shipping, alteration, or unauthorized repair of any Bishamon product or part. For complete details of warranty, please contact Bishamon at: 800-358-8833.




Bishamon Industries Corporation

5651 East Francis Street  
Ontario, California 91761-3601

Ph: 800-358-8833 US & Canada  
909-390-0055 Outside US/CN  
Fax: 800-700-0492

[www.bishamon.com](http://www.bishamon.com)

DISTRIBUTED BY:



BIC-OPT-08-14



Bishamon's  
Next Generation of  
Quality Lift Tables

Bishamon  
ON-DEMAND



Lift3K™



Lift2K®



Lift5K™

Experience Industry's  
"Best Engineered"  
Line of Lift Tables

Learn More at: [bishamon.com](http://bishamon.com)

Working Harder To Make Your Job Easier

Working Harder To Make Your Job Easier

The **Best Engineered** Lift Tables

Made in USA!



Optimus® LK Series Standard Features

- Complies with ANSI MH 29.1:2012 "Safety Requirements for Industrial Scissors Lifts"
- 115 volt operator control system
- 230 and 480 volt power units have a 24 VAC operator control system
- Flow limiting valves
- Pressure compensated flow control at power unit
- Hinged maintenance bars
- Self-lubricating, maintenance free bushings at all pivot points
- Unitized, compact, internal power unit and reservoir combination
- Continuous axles at rollers
- Cylinders are heavy duty with chrome plated rods
- Contoured platform corners for operator safety - see photo back page
- Easy view hydraulic reservoir
- All electrical components are UL or CSA Certified
- Intuitive and user-friendly plug and play controls
- Clean, accessible, maintenance friendly design
- Durable powder coated finish
- Entrapped rollers in base frame and platform for added stability




STANDARD MODELS

Optimus Lift2K® Series									
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight
				Lowered	Raised				
L2K-2848	30	2,000	28 x 48	8.50	38.50	115 VAC	24	12	469
L2K-3648	30	2,000	36 x 48	8.50	38.50	115 VAC	24	12	490
L2K-TT	30	2,000	43 Dia. Rotating	11.50	41.50	115 VAC	24	12	540
L2K-FC Foot operated controls with guard (Hand control standard)									
Optimus Lift3K™ Series									
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight
				Lowered	Raised				
L3K-2848	34	3,000	28 x 48	8.63	42.63	115 VAC	25	12	530
L3K-3648	34	3,000	36 x 48	8.63	42.63	115 VAC	25	12	560
L3K-TT	34	3,000	43 Dia. Rotating	11.75	45.75	115 VAC	25	12	680
L3K5K-FC Foot operated controls with guard (Hand control standard)									
Optimus Lift5K™ Series									
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight
				Lowered	Raised				
L5K-3256	39.25	5,000	32 x 56	8.75	48	115 VAC	50	24	730
L5K-4872	39.25	5,000	48 x 72	8.75	48	115 VAC	50	24	1030
L3K5K-FC Foot operated controls with guard (Hand control standard)									

OPTIONAL MODELS

Optimus Lift2K® Series									
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight
				Lowered	Raised				
L2K-TT4444	30	2,000	44 X 44 Rotating	11.50	41.50	115 VAC	24	12	630
L2K-TT4448	30	2,000	44 X 48 Rotating	11.50	41.50	115 VAC	24	12	640
L2K-TT4848	30	2,000	48 X 48 Rotating	11.50	41.50	115 VAC	24	12	650
Options & Accessories for L2K Series									
L2K-FC	Foot operated controls with guard (Hand control standard)								
L2K3K-ABS	Accordion bellows skirting								
EZ-SLP	Semi-live portability for moving unloaded lift (2 wheels and dolly handle)								
EZ-CART	Cart portability with 2 swivel wheels and 2 rigid wheels (adds 7" to lowered and maximum raised heights)								
Optimus Lift3K™ Series									
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight
				Lowered	Raised				
L3K-SPECIAL	34	3,000	(28x48 to 48x72 in 2" increm.)	8.63	42.63	115 VAC	25	12	660
L3K-TT4444	34	3,000	44 X 44 Rotating	11.75	45.75	115 VAC	25	12	770
L3K-TT4448	34	3,000	44 X 48 Rotating	11.75	45.75	115 VAC	25	12	780
L3K-TT4848	34	3,000	48 X 48 Rotating	11.75	45.75	115 VAC	25	12	790
Options & Accessories for L3K Series									
L3K5K-FC	Foot operated controls with guard (Hand control standard)								
L2K3K-ABS	Accordion bellows skirting								
EZ-CART	Cart portability with 2 swivel wheels and 2 rigid wheels (adds 7" to lowered and maximum raised heights)								
LK-230PU-1	230 VAC, 1 Phase motor with 24V controls: no change in up time								
LK-230PU-3	230 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds								
LK-480PU	480 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds								
Optimus Lift5K™ Series									
Model	Travel (in)	Capacity (lbs)	Platform Size (in)	Height (in)		Voltage	Approx. Up Time (Sec)	Approx. Dn. Time (Sec)	Approx Shp Weight
				Lowered	Raised				
L5K-SPECIAL	39.25	5,000	(32x56 to 48x84 in 2" increm.)	8.75	48	115 VAC	50	24	1075
L5K-TT	39.25	5,000	43 Dia. Rotating	11.87	51.12	115 VAC	50	24	870
L5K-TT4444	39.25	5,000	44 X 44 Rotating	11.87	51.12	115 VAC	50	24	1000
L5K-TT4448	39.25	5,000	44 X 48 Rotating	11.87	51.12	115 VAC	50	24	1015
L5K-TT4848	39.25	5,000	48 X 48 Rotating	11.87	51.12	115 VAC	50	24	1030
Options & Accessories for L5K Series									
L3K5K-FC	Foot operated controls with guard (Hand control standard)								
L5K-ABS	Accordion bellows skirting								
LK-230PU-1	230 VAC, 1 Phase motor with 24V controls: no change in up time								
LK-230PU-3	230 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds								
LK-480PU	480 VAC, 3 Phase motor with 24V controls: decreases up time to 14 seconds								

Some options and accessories are not field installable - consult sales  
Note: Not all options are compatible - consult sales  
Option and accessory pricing applies to options purchased with an LK-Series lift table at time of order

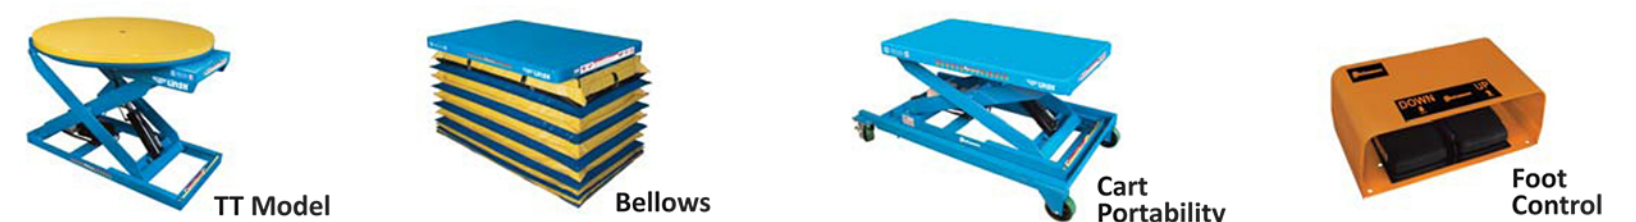

Working Harder To Make Your Job Easier

Working Harder To Make Your Job Easier